

Rev 1.1 - 1 August 2009

DATA SHEET

## Newlath Plug

Above ground the Newlath Plug can be used internally and externally to secure Newton meshed membranes: Newlath 2000 and Newtonite. Use a 7mm SDS drill bit to drill through membrane and substrate prior to hammering home fixing plug.

Size (Width x Length)	50mm x 50mm
Quantity Per Bag	250
Order Code	A16



## Newton Mastic

Newton Mastic is used with Newlath 2000 and Newtonite. It is applied to the plug before fixing into the membrane, which serves to stop any 'bridge' happening between the damp or stained surface and the new surface.


Unit of Sale	0.38 litre tube
Order Code	A18



## Newton Cob

Above ground, the Newton Cob fixing is used with Newlath 2000 and Newton 500 Membrane Systems. The Newton Cob plug has an expanding stem which provides effective anchorage in a wide range of base materials.

Size (Width x Length)	70 x 90mm
Quantity Per Bag	50
Order Code	A17

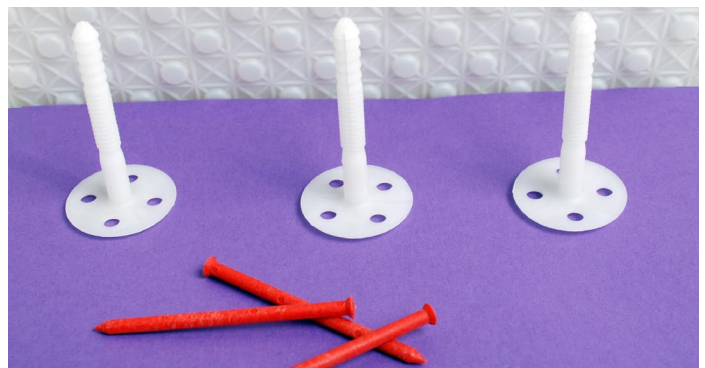

## Newton Profile

Newton Profile can be used with Newtonite and Newlath 2000. It serves as a plaster stop, guaranteeing that the plaster/render will stop short of the floor.

Size	2m lengths
Unit of Sale	Single units
Order Code	A19

